


LINE ON Mini

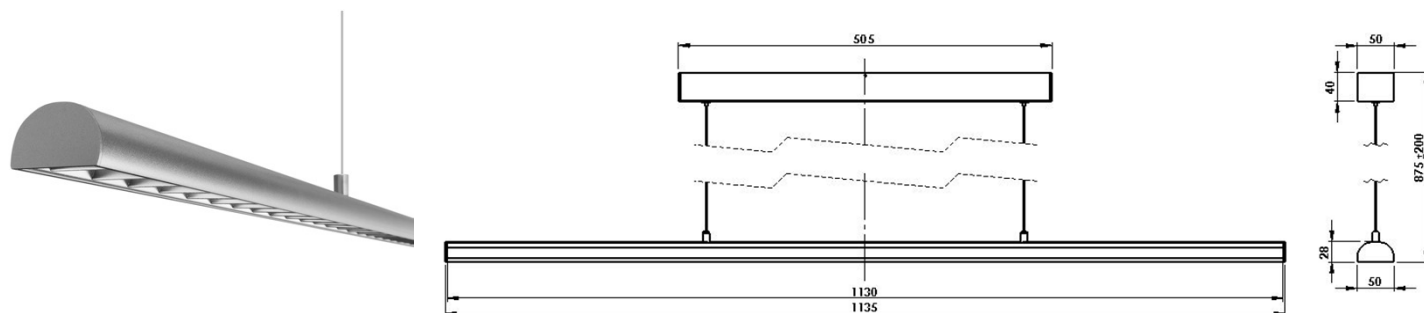

LINE ON Mini -Part.No.:1.41201_UGR 19 - 4 ft_1135mm_360mA_1743 lm_15 W_Ta 25°C

lightsource	Lichtquelle	2xFortimo LED Strip 2ft 2200lm 830 FC LV4	
Driver	Vorschaltgerät	Xitanium 36W 0.3-1A 54V 230V	
Efficiency Fixture	Effizienz Leuchtensystem	118	(lm/W) @Tc~ 45°C
Efficiency LED	Effizienz LED	172	(lm/W)@Tc~ 45°C
Reflector Part.No.	Reflektor Art. Nr.	14784S13387	
Reflector	Reflektor	~2 x 46°=92°	
LOR	Wirkungsgrad	84%	(%)
Unified Glare Rating	UGR	19	4H / 8H_70/50/20
Total Power Consumption	Anschlussleistung Leuchte	14,7	(Watt)
LED Power	LED Leistung	12	(Watt)
Initial Lumen LED	Lichtstrom LED warm	2064	(Lumen @Tc~ 45°C)
Initial Lumen fixture	Lichtstrom Leuchte warm	1743	(Lumen @Tc~ 45°C)
Luminaire colors	Leuchten Farben	white, black, silver	


Color Temperature	Farbtemperatur	3000	(K)
Color rendering Index - CRI	Farbwiedergabe Typisch	80	(CRI - Ra)
Color stability - Binning	Farbstabilität McAdam	3-Step McAdam	McAdam

Dimming Capability	Regelbarkeit	/	
Dimming range	Dimmbar	/	
protection class	Schutzklasse	1	
IP rating	Schutzart	IP20	

start up time	Anlaufzeit	<1	(Sekunden/seconds)
overload protection	Überlastschutz	<input checked="" type="checkbox"/>	
short-circuit proof	Kurzschlusschutz	<input checked="" type="checkbox"/>	
voltage feed	Spannungsversorgung	220 - 240V +/- 10%	50- 60 Hz

ambient temperature	Umgebungstemperatur	0° - 30°C	Typical Ta 25°C
cooling	Kühlung	Passiv	

warranty	Garantie	5	Jahre / Years
-----------------	-----------------	----------	----------------------

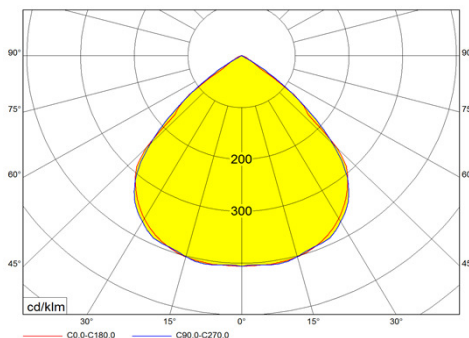


The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors

Technische Änderungen vorbehalten / Technical specifications are subject to optimize

V2 Stand 21.02.2018

LINE ON Mini

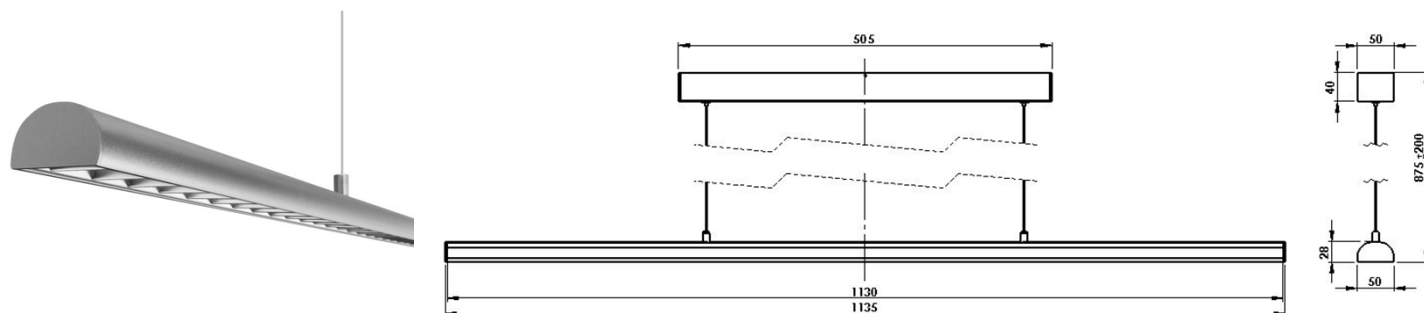

LINE ON Mini -Part.No.:1.41201_UGR 22 - 4 ft_1135mm_498mA_2575 lm_20 W_Ta 25°C

lightsource	Lichtquelle	2xFortimo LED Strip 2ft 2200lm 830 FC LV4	
Driver	Vorschaltgerät	Xitanium 36W 0.3-1A 54V 230V	
Efficiency Fixture	Effizienz Leuchtensystem	129	(lm/W) @Tc~ 45°C
Efficiency LED	Effizienz LED	177	(lm/W)@Tc~ 45°C
Reflector Part.No.	Reflektor Art. Nr.	14784S23387	
Reflector	Reflektor	~2 x 46°=92°	
LOR	Wirkungsgrad	89%	(%)
Unified Glare Rating	UGR	22	4H / 8H_70/50/20
Total Power Consumption	Anschlussleistung Leuchte	19,7	(Watt)
LED Power	LED Leistung	16	(Watt)
Initial Lumen LED	Lichtstrom LED warm	2898	(Lumen @Tc~ 45°C)
Initial Lumen fixture	Lichtstrom Leuchte warm	2575	(Lumen @Tc~ 45°C)
Luminaire colors	Leuchten Farben	white, black, silver	


Color Temperature	Farbtemperatur	3000	(K)
Color rendering Index - CRI	Farbwiedergabe Typisch	80	(CRI - Ra)
Color stability - Binning	Farbstabilität McAdam	3-Step McAdam	McAdam

Dimming Capability	Regelbarkeit	/	
Dimming range	Dimmbar	/	
protection class	Schutzklasse	1	
IP rating	Schutzart	IP20	

start up time	Anlaufzeit	<1	(Sekunden/seconds)
overload protection	Überlastschutz	<input checked="" type="checkbox"/>	
short-circuit proof	Kurzschlusschutz	<input checked="" type="checkbox"/>	
voltage feed	Spannungsversorgung	220 - 240V +/- 10%	50- 60 Hz

ambient temperature	Umgebungstemperatur	0° - 30°C	Typical Ta 25°C
cooling	Kühlung	Passiv	

warranty	Garantie	5	Jahre / Years
-----------------	-----------------	----------	----------------------

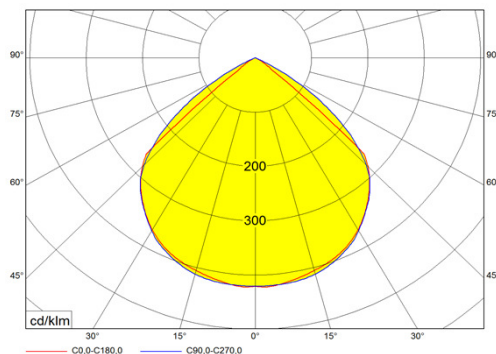

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, those for the CRI +/- 1.5 and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors

Technische Änderungen vorbehalten / Technical specifications are subject to optimize

V2 Stand 21.02.2018